

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

THIS PAGE BLANK (USPTO)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:
Ming-Yee CHIU

Art Unit: Unassigned

Serial No.: Unassigned

Examiner: Unassigned

Filing Date: January 31, 2001

For: Method and Apparatus for
Monitoring an Analog Meter


**REQUEST FOR PRIORITY UNDER 35 USC §119(a)**

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Applicant herein and hereby requests the benefit of priority under 35
U.S.C. §119(a) to the priority European patent application EP 00101947.0, filed
February 1, 2000, for the above-identified US utility patent application.

Respectfully submitted,


Jacob Eisenberg
Attorney for Applicant
Registration No. 43, 410

Date: Feb. 1, 2001

Epping, Hermann & Fischer
Ridlerstrasse 55
D-80339, Munich, Germany
+49 89 500-3290

THIS PAGE BLANK (USPTO)



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00101947.0

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE,
LA HAYE, LE

16/01/01

THIS PAGE BLANK (USPTO)



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.: 00101947.0
Demande n°:

Anmeldetag:
Date of filing: 01/02/00 ✓
Date de dépôt:

Anmelder:
Applicant(s):
Demandeur(s):
Setrix AG
80807 München
GERMANY

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
Method and apparatus for monitoring an analog meter

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:
G01D5/39, G06K9/20

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR ✓
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

THIS PAGE BLANK (USPTO)

Description

Method and Apparatus for Monitoring an Analog Meter

5 FIELD OF THE INVENTION

The invention refers to a method for monitoring an analog meter by recording a digitized image of the meter whereby the meter comprises a set of graduation segments and at least one
10 needle. The invention further refers to an apparatus for performing the above method.

BACKGROUND OF THE INVENTION

15 Analog meters have been used in conjunction with sensors to provide visual display of the physical parameter that the sensor is designed to measure. Even though digital meters are now available, analog meters are still used widely, especially for situations where use of electricity is to be avoided
20 for the reason of preventing electrical spark near the fuel storage tanks. These meters are usually installed in widely separated geographical regions so gathering the meter information requires wide-area communication network. Fortunately, the cost of sending compact digital data such as the meter
25 reading or meter conditions is becoming very inexpensive nowadays. One example is the use of Short Message Service of the wireless GSM network. Therefore it is desirable to equip an analog meter installed in the field with a "non-contact" device that is capable of reading the meter digitally and
30 sending the data or other conditions to a user or a computer system on the wired or wireless communication network. The reading device must be flexible to read different meters and must be able to perform a precise reading at reasonable time.

35 Previous image processing work by Robert Sablatnig et al.: "Automatic Reading of Analog Display Instruments", Proc. of the 12th International Conference on Pattern Recognition

(1994), pp 794-797 as well as "Machine Vision for Automatic Calibration of Analog Display Instruments", SPIE Proc. on Machine Vision applications in Industrial Inspection III, vol. 2423 (1995), pp 356-366 described methods to read the analog utility (gas, water or electricity) meters. Utility meters differ from the gauge-like meter. First, a utility meter has multiple dials. Each dial has a needle that reads one digit (0-9) of the entire reading. In contrast, the gauge-like meter has only one dial or scale with fine reading resolution ranging from 1 out of 50 or 1 out of 1000. Second, the needle of a utility dial rotates continuously in one direction only. The needle of the gauge-like meter can only rotate in less than 360 degree and in both directions. Sablatnig et al. use the Hough transform technique to detect and locate the outlining circles of all dials in the utility meter. There is no detection of the graduation marks of the dial. The basic operation of the Hough Transform is described in Ballard and Brown: "Generalizing the Hough transform to detect arbitrary shapes", Pattern Recognition Vol. 13(2) (1981), pp 111-122 and E.R. Davies: "Machine Vision: Theory, Algorithms, Practicalities", Academic Press (1996).

US patent 5,013,154 describes a "System for remotely reading an analog meter". The teaching of this patent uses a video camera and an information processing system with look-up table to read gauge-like analog meters. The patent assumes that a pre-defined path of interest on the image plane is known. The information processing system extracts the intensity profile along the pre-defined path from the image and detects the location of the needle pointer based on the reflectivity difference between the needle and the background. A relative distance along the defined path between the needle and the starting point of the defined path indicates the reading. One assumption that the patent makes is that there is no black character, graphics or scale mark along the path of interest that can interfere with the black needle. The patent also as-

sumes that the position and orientation of the meter is fixed with respect to the imaging system.

- US Patent 5,673,331 teaches methods for reading gauge-like analog meters from video images. It also assumes that the position and orientation of the meter is fixed. Using a pre-operation calibration procedure to determine data such as the position of the needle pivot point and the leftmost and rightmost points of travel of the needle, the system performs the reading by locating the angular position of the needle pointer and compares it with the calibrated data. It uses a 2D template matching technique to determine the angular position of the needle.
- US Patent 5,559,894 describes methods for inspection and reading of utility meters (not gauge-like meters). It first uses pre-defined templates to identify a particular meters and determine its relative position and orientation with respect to the fixture. From the position and orientation data, the angular positions of all the dial needles are determined. Again, one dial decides one digit of the meter reading.

It is an objective of the invention to provide a method for monitoring an analog meter which is flexible and allows easy installation for various existing analog meters.

It is another objective of the invention to provide an apparatus to perform that method so that flexible installation and remote monitoring of various analog meters is allowed.

SUMMARY OF THE INVENTION

With respect to the method the objective of the invention is solved by a method for monitoring an analog meter having a set of graduation segments and at least one needle, the method comprising the steps of: recording a digitized image of the meter, the meter; extracting a set of edge points rep-

representative of the graduation segments from said image; performing a Hough Transform on said set of edge points to obtain a center point of said set of graduation segments; and extracting an intensity profile of said image along a path
5 through said graduation segments to obtain a set of detected graduation segments and to obtain a position of said needle relative to said set of detected graduation segments.

With respect to the apparatus the objective of the invention
10 is solved by an apparatus for performing the above method for monitoring of an analog meter comprising: a sensor for obtaining a digitized image; a processor for extracting a set of edge points representative of graduation segments of said meter from said image, for performing a Hough Transform on
15 said set of edge points to obtain a center point, for extracting an intensity profile of said image along a path through said graduation segments to obtain a set of detected graduation segments and for obtaining a position of said needle relative to said set of detected graduation marks; and an
20 interface device to communicate with a communication network.

The algorithm according to the method locates the center of the meter scale and then detects the graduation marks of the scale. It detects the leftmost and rightmost travel of the
25 scale and the needle pointer. From these data, the meter reading is derived by comparing the relative position of the needle within the arrangement of the detected graduation marks. The invention is applicable to utility meter having a graduation scale and at least one needle. The algorithm can
30 read multiple meters within one image and computes the reading even when the analog meter is viewed from an oblique angle. Due to the parallel shift between the scale and the needle pointer, additional computational effort must be performed. The method employs the Hough Transform to obtain the
35 center of the scale and the needle. Whereas the Hough Transform usually is used with a continuous area, the method according to the invention applies strong edge points from the

set of individual spaced graduation marks as input signals to the Hough Transform.

Only during the training period, when the method and the apparatus are adopted to a specific meter, it is necessary to perform the Hough Transform for the detection of the graduation marks. When the relative arrangement between the meter and the camera of the sensing apparatus does not change, it is sufficient to extract the intensity profile and detect the position of the needle within the graduation scale. When the algorithm detects that the meter moved, meter and graduation scale detection by employing the Hough Transform has to be performed again. As detection criterion for a move of the meter, a parameter which represents the accuracy of the location of the needle is used. Advantagously, this parameter is the number of contiguous angles where the intensity profile is low in the area between the center point and the graduation marks of the scale. This parameter indicates the width of the needle.

20

The Hough Transform is performed on strong edge points of the rectangular shaped graduation marks. The transform computes candidate segments in the direction orthogonal to the gradient of an edge point and at a predefined distance apart from the edge point. By calculating an extreme value of the distribution of the candidate segments and the centroid of the extreme value, the coordinates of the center of the scale and the needle are obtained.

30 From the intensity profile of the graduation marks each graduation mark can be individualized by locating extreme values ("teeth") and applying a deep-pocket criterion to eliminate any local extreme values which do not originate from a graduation mark.

35

When a meter is viewed from an oblique angle the circular graduation scale appears as an ellipse. A circular intensity

profile may not capture all graduation marks so that more than one intensity profile at different radii is extracted, and the detected intensity teeth are merged to obtain a full graduation scale. The correct scale of graduation marks is
5 detected when the number of teeth is close to the specified number of graduation marks. Practically, an arrangement of detected teeth is considered as the correct graduation scale whose number of detected teeth is within plus or minus one of the specified number of graduation marks.

10

Further when viewing with an oblique angle, the pivot center of the needle and the center of the scale do not coincide. Then, another Hough Transform calculates the center of the needle since the needle either has the shape of a disc or has
15 a hole near the needle pivot center. The input area to the Hough Transform can be restricted to the surrounding area of the scale center. The Hough Transform is performed in the conventional manner.

20 The method and the apparatus can be used for condition reporting of analog, utility type meters using a wired or wireless communication network. When the actually captured meter value meets a certain condition, which can be input via the network, a message or condition report is transmitted to a
25 central control station. There, further activities can be initiated.

The apparatus for performing the method has a fully digital architecture and can be further integrated when circuit technology advances. The imaging subsystem captures the image of
30 the meter. The embedded processor performs image processing as well as image analysis to derive the meter reading in form of a digital value. The CPU may run web server software so that it reacts to the requests of a client connected
35 through communication modules within the apparatus, such as ISDN, Modem or GSM modules. If the Short Message Service of a

GSM network is used, then any cellular phone can read any meter independent of the time and place.

BRIEF DESCRIPTION OF THE DRAWINGS

5

The accompanying drawings show the principles of the invention and an preferred embodiment. Corresponding elements are denoted by like numerals. The drawings show:

10 Figure 1 a block diagram of a meter reading apparatus;

Figure 2 a flowchart of the operation of the apparatus for orthogonally viewing the meter scale;

15 Figure 3 edge points for a Hough Transform of a contiguous area;

Figure 4A and 4B stand 4C candidate segments for a radial line segment of the graduation scale, edge points
20 of the graduation scale, and two different sets of candidate segments for the full graduation scale, respectively;

Figure 5A and 5B and 5C different intensity profiles with local maxima and minima;
25

Figure 6 a relation between a needle pointer and radial line segments as well as corresponding intensity profiles;
30

Figure 7 a flowchart for the operation of the apparatus for oblique viewing the meter scale; and

Figure 8 a flowchart for the operation of the apparatus with a detection for any moving of the meter.
35

DETAILED DESCRIPTION OF THE INVENTION

The present invention relates to an apparatus consisting of an imaging subsystem and a computer or an embedded processor to process the image from the imaging subsystem. The image
5 from the imaging subsystem is digitized and stored in the computer for further processing. Without loss of generosity, it is assumed that the image is digitized with a square spacing.

10 Usually the camera views the analog meter in an orthogonal or normal direction. The circular scale will then look like a circle on the image. However, in some situation the camera has to be positioned sidewise so that the meter is viewed obliquely. In this case the circular scale will appear as an
15 elliptic shape. This invention can deal with both situations.

The method and the apparatus according to the invention serves to read a wide variety of analog meters. Therefore the design of the machine vision algorithm is to detect and lo-
20 cate features that are common among analog meters. From the image processing perspective, an analog meter consists of a circular graduated scale, a needle pointer, characters and logos on the dial surface and a metal or plastic casing. The graduation scale, the characters and graphic logos are all
25 located on the scale surface. The needle moves on a plane that is usually higher than the plane of the scale. Therefore if the meter is viewed obliquely, the center of the pointer will not coincide with the center of the graduation scale.

30 There are many designs of the graduation scale. However, almost all analog meters have a basic graduation scale that is represented by short radial line segments (RLS) arranged in a circle. The angular span of the scale can be from 60 degree (e.g., a voltmeter) to 270 degree (e.g., most pressure gau-
35 ges). All radial line segments intercept at the center of the scale, which is also the center of rotation of the needle if the meter is viewed normally. Some meters have dual graduati-

on marks in reading in different units. The angular spacing between the scale graduation marks is not necessary uniform. Because all meters have this radial line pattern, the present invention detects and locates this radial line segment pattern. By comparing the needle angle with respect to the angles of the detected graduation marks, the present invention can read meters with linear or non-linear graduation scale.

- 10 Many analog meters have longer coarse graduation marks separated at multiples of the finest graduation marks. In the present invention, only the finest graduation marks, or the finest spaced RLS, are detected and used.
- 15 Needle pointers can also take many shapes. In general, a needle is narrow on one side of the needle pivot point. On the other side, the shape can be arbitrary, but usually is wider and shorter. The needle tip may or may not reach into the region of the graduation marks. The needle usually has a circular shape near the needle pivot center.
- 20

Characters and graphics on the scale surface show the coarse scale numbers, the company logos and other information. Even though useful to a human reader, these characters and graphic symbols are not detected and used in the present invention. During training of a meter type, the system needs to know what reading the leftmost graduation mark is and how much reading increment for each increment of graduation mark. In some analog meters, the leftmost graduation mark does not necessarily correspond to a zero reading.

25

30

The casing of the analog meter is usually round. If the casing is made of stainless steel, its reflective surface made it an unreliable feature for image processing. When the illumination is not diffuse and uniform, the casing can cast a shadow on the surface of the scale. If viewed normally, the

35

shadow takes the shape of a partial circle and it co-exists with other circle features from the round casing.

The automatic reading device 70 shown in figure 1 comprises
5 an image sensor 71 which captures an image of a single or several analog meters 81, 82. The sensor may be a CMOS image sensor or a CCD device. The apparatus comprises an embedded processor 72 which preferably runs with a standard operating system. The processors 72 performs the algorithm for image
10 analysis and meter reading. The processor has an image processing subsystem 73 and a communication subsystem, preferably a web server module 74 as shown in the example. The processor is connected to one or multiple communication modules, e.g. a GSM module 75, an ISDN interface 76, or an analog modem 77.
15 The communication module provides connectivity to a wired or wireless communication network 83. Via the communication network 83 the device 70 can communicate with a central station which monitors the operation of the device or responds to inputs from the device. Any communication over the wireless
20 communication network may employ Short Message Service. The device 70 may also receive control inputs from a cellular phone 84. The input may be a reference value for comparison with the meter reading. When the read value exceeds the reference value, a transmission of a message is performed.

25 Figure 2 shows a flow chart depicting an overview of the vision algorithm software performing the automatic reading of an analog meter when the meter is viewed from a normal direction. For an oblique-view image of a meter, more processing
30 steps are needed which will be described later in connection with figure 7. In the first step 8 of Figure 2, two 3X3 Sobel edge operators are convolved with the image of the analog meter to obtain the horizontal and vertical edge gradient (g_x , g_y). The magnitude and the direction of the edge gradient are
35 computed. All pixels with a gradient magnitude greater than a threshold are classified as strong edge points. The threshold for the gradient magnitude should be set so that most of the

edge points of the graduation marks are selected. It can be a fixed parameter or defined during the meter type training stage by computing the average gradient magnitude of the graduation marks in an area selected by the human trainer.

5

Hough transform (HT) in general is used extensively in the past for the detection of lines, circles, ellipses, and other shapes such as corners, and polygon. The book by Davies has an extensive discussion on the techniques. In the prior art, 10 the shape detected by Hough Transform is mostly formed from one single contour, whereas the invention uses the Hough transform for the detection of multiple radial line segments (RLS) arranged on a circle. The RLS as such are separated from each other. To explain the Hough Transform technique for 15 the circular RLS pattern, it is instructive to review the HT for the circle detection first. Referring to Figure 3, the black disk 16 has an irregular boundary 20. After edge gradient operation and thresholding, all strong edge points, such as A, B, or C, lie on the boundary 20. For a black disk, the 20 edge gradient points outward. Thus at strong edge point A, the opposite of its edge gradient 17 points toward the center of the circle. Therefore if the radius of the circle R is known, a candidate center point that is R distance away from the edge point A along the negative gradient direction 18 is 25 placed on a so-called parameter plane. The parameter plane refers to the x - and y -coordinates of the center of the circle. Each candidate point is a vote at its location on the parameter plane. For another strong edge point B that is also on the edge of the same circle, another candidate center 30 point will be placed close to the previous one. On the other hand, for a strong edge point C that is not on the edge of the same circle but on the irregular boundary 20, its candidate center point will be located at some other place. By accumulating all the candidate center votes from all strong 35 edge points, a cluster 19 will be formed at the center of the circle. The location of the circle can then be determined by peak detection of the cluster. If the radius of the circle is

not known, then the parameter space becomes three-dimensional, or multiple parameter planes. Each parameter plane is used to accumulate candidate center points for each circle of specific radius. If a peak is detected on a parameter plane of a particular radius, then a circle with this specific radius with center at the peak location is found. Since multiple parameter planes consume large memory, therefore in practice a range of potential radius is given and only one single parameter plane is used. In such case instead of placing a candidate center point, many points along a candidate center "line segment", which corresponds to the range of potential radius, is placed on the parameter plane for vote accumulation. Then a peak corresponds to the detection of a circle with a radius within the range given. If needed, further processing can determine the exact radius of the circle. With a slight modification, the Hough Transform can be used to detect a hole whose edge gradient points inward toward the center of the circle.

The Hough Transform according to the invention for the circular RLS pattern is now described. Like the circle Hough Transform, only a single parameter plane will be used for vote accumulation. Referring to Figure 4B, under spatial digitization, each RLS is a narrow rectangle 28. The previous edge extraction step 8 actually extracts two lines of strong edge points such as 29, 30 along two sides of the medial axis 34 of the RLS. The two edge points 29, 30 of a RLS have opposite gradient direction 32, 33 and are slightly off from the medial axis of the RLS. Ideally, the center of the RLS pattern lies on the medial line of the RLS, not the two edges of the RLS. However, it is assumed for now that the edge points are very close to the medial line.

It is assumed that the mean radius R_0 of the circular RLS pattern, or the distance from the center of the pattern to the middle point of the graduation mark, is given. Referring to Figure 4A, for each strong edge point 22 (which can come

from either side of a RLS), a candidate line segments 23 orthogonal to the edge gradient 25 is placed on the parameter plane for vote accumulation. The distance from the strong edge point 22 to the middle of the candidate line segment 23 should equal to the mean radius R_0 . The length of the candidate line segment, which is denoted as G , is selected as a fixed factor α multiplied by the length L of the RLS, which is also given. Usually this factor is greater than 1. Since the center of the pattern can be located on either side of the strong edge point 22, another mirrored candidate line segment (not shown in Figure 4A) on the opposite side of the strong edge point 22 will also be placed on the parameter plane. For another strong edge point 26 on the same RLS, similar candidate line segments 27 of length G , with an axial shift, will be placed on the parameter plane. The accumulated votes from all edges points on a RLS form a trapezoidal line spread function 24. The base of the trapezoidal line spread function has a width of $G + L$ and the top plateau region has a width of $G - L$. For edge points on another RLS, two candidate line segments with the same line spread function will be placed on the parameter plane with a slightly different angle. As shown in Figure 4C the one of the candidate line segments focusing toward each other will create an overlapping radial pattern 35 around the center of the original circular RLS pattern 21 while the other set 36 will spread widely around a larger circle. This vote distribution function on the parameter plane will have a peak 37 located at the center of the RLS pattern 21. Normally the peak to background ratio is very high for analog meters because most of the non-RLS related edge points contribute candidate points that are spread sparsely on the parameter plane. On the other hand, there are 10 - 15 strong edge points from each of the 50 - 100 graduation marks that contribute candidates line segment concentrating near the center of the RLS pattern.

35

The two processing parameters: the mean radius R_0 of the circular finest graduation marks and the length of the finest

graduation marks L , depend on the meter type. Both parameters are defined during the training of the meter type. When a meter of multiple graduation scales exist, the selection of mean radius R_0 decides which graduation scale will be used.

5

The use of the edge points in lieu of the median line points for Hough Transform described above can be improved by a simple technique. Referring back to Figure 4B, if the distance W between the two edge points 29, 30 is known, then an estimated median line point can be obtained by shifting the edge point a distance $W/2$ along the negative edge gradient direction. Ideally the distance W is determined by the number of pixels sampled across one graduation mark (or one RLS) which varies from meters to meters and from fine graduation marks to coarse graduation marks. Experiments show the shift of 1 pixel is satisfactory for most meters with appropriate image resolution (320 x 240 to 640 x 480 pixels).

The next step 10, shown in Figure 2, is to detect and locate the peak from the vote distribution function generated from the Hough Transform described above. If there is only one circular RLS pattern (or one analog meter) in the image, which is usually the case for analog meter reading, then the peak can be determined by finding the maximum of the vote distribution function. If there are multiple meters in the image, then the second peak can be found by searching for a maximum after zeroing out the value of the vote distribution function around the first peak region. The process can be repeated for detecting more meters. The center of the circular RLS pattern can be estimated by computing the centroid of the peak, e.g. using the formula

$$x_c = \sum_{i,j} x_i f(x_i, y_j) / \sum_{i,j} f(x_i, y_j),$$
$$y_c = \sum_{i,j} y_j f(x_i, y_j) / \sum_{i,j} f(x_i, y_j).$$

The summation is over a limited area around the peak of the vote accumulation function f . Because the peak to background ratio is high usually, the centroid estimate is not very sensitive to the size of the summation area as long as the entire peak is included within the summation computation.

The detection and localization of the RLS pattern by the Hough Transform according to the invention do not require that the radial line segments occupy a complete circle or are uniformly distributed in angle. Graduated scales of most pressure gauges have a 270 - degree span while scales of most electronic analog multi-meters have less than 90 - degree span. However, the estimated centroid location of the RLS pattern is slightly sensitive to the correctness of the mean radius given, especially if the angular span of the RLS pattern is less than 180 degrees. This is because if the mean radius given is either shorter or longer, the line spread function 24 (Figure 4A) coming from an RLS will not be centered at the center of the RLS pattern. Thus if there is no similar line spread function contribution from an RLS 180 degree apart, the accumulated votes will not be symmetrical around the center. When contiguous candidate line segments are missing from one side, then the computed centroid will be shifted away from the true center of the pattern.

25

The center of the RLS pattern corresponds to the center of the meter's scale. The next step 11 (Figure 2) is to extract the intensity profile of the image cutting through the finest-spaced graduation marks. A circular path centered at the estimated center of the RLS pattern and with the mean radius R_0 is used to extract the intensity profile. The next step 12 is to detect and locate the individual graduation marks. A graduation mark appears as a deep-pocket minimum, called a "tooth", on the intensity plot. For repeated black graduation mark pattern, the teeth form a comb-like pattern on the intensity profile. Since there are characters or graphics on the scale surface, the intensity profile may contain other

teeth that have a spatial frequency quite close to that of the graduation marks. In other words, the intensity profile can contain sections of comb-like teeth structure from characters and graphics quite similar to those from the graduation marks. The algorithm needs to distinguish combs corresponding to the graduation marks from combs that are not graduation marks.

A detailed explanation of the step 12 follows. First all the teeth are located. Then the spacing between teeth are checked so that only contiguous teeth with spacing less than a threshold are grouped into combs. Finally the one comb with the number of teeth that is close to a specified number of graduation marks is considered as the correct graduation scale. From this detected graduation scale, the angular positions of the beginning of the scale and the end of the scale are determined. Referring to Figure 5A, a tooth is defined as a local minimum in intensity 38 whose intensity's increase to the nearby local maxima 39, 40 is greater than a pre-defined threshold, as shown in the figure with the data points circled. This deep-pocket criterion for both sides of the local minimum can eliminate an intensity edge as shown in Figure 5B. However, it also ignores some legitimate teeth as shown in Figure 5C that occurs because of the noise in the image intensity (left diagram) or a thick graduation mark (right diagram). Therefore the software will detect these teeth by finding two neighboring one-sided steep minima 41, 42 that are separated by a distance less than a threshold. In this case, the location of the teeth is defined as the midpoint between the two local minima. Once all the teeth are detected, the algorithm then checks for the spacing between neighboring teeth. All teeth with neighboring spacing less than a threshold are grouped into one comb. This spacing threshold can be computed as the median value of all the spacing between neighboring teeth. In other words, there are 50% of the neighboring teeth's spacing below this threshold and 50% above. The median of the teeth's spacing, instead of

the average of the teeth's spacing, is a reliable method to estimate the spacing between the graduation marks because more than 50% of the teeth detected are graduation marks. Since the intensity profile is an angular function, the beginning and the end of the profile array actually are neighbors. Thus the algorithm needs to check if a comb at the end of the intensity profile actually connects to a comb at the beginning. After all the combs are detected, the algorithm finds one comb whose number of detected teeth is within plus or minus one of the designed number of graduation marks. This comb corresponds to the graduation scale. The reason for plus or minus one is to account for the tip of the needle pointer. As shown in Figure 6, when the tip of the needle is included in the intensity profile, its position can either overlap, separate slightly or separate completely from the graduation marks as shown in the left, middle and right diagrams. The corresponding intensity profiles of these three situations are shown at the bottom. For the right diagram case, the total number of detected marks is one extra. For the middle case, the needle and the touching graduation mark may both be missed because of the intensity fluctuation. Therefore the detected number is one less. For the left diagram case, the detected number of graduation marks is the same as the designed number.

When none of the comb has a teeth number that matches the designed number of graduation marks, then it is possible that some graduation mark has so low a contrast that it is not detected. In this case, the graduation scale is divided into two or three combs. Therefore the algorithm checks for two or three neighboring combs to see if the total number of teeth come close to the designed number of graduation marks. If yes, then the algorithm can interpolate the missing graduation marks. If no, an error message is given.

Next step 13 is the detection and localization of the needle pointer. When the meter is viewed normally, the scale center

coincides with the needle pivot point. Since the needle can rotate to any angular position within the range of the scale, the black needle can overlap with the high-contrast black graphic background at many possible needle angles. Therefore
5 two sides of the needle may not appear as straight lines. To avoid the problem due to complex background, patent 5,673,331 uses the template matching technique to match the shape of the needle at various angles to the image. The angle with the best match score determines the angle of the needle. The
10 technique requires that the shape of the needle be trained first. The present invention, however, uses a simple and fast method that also overcomes the problem of cluttered background. This technique is based on the observation that at angles where the needle is located, the radial intensity profile from an inner radius $R_1 = a * R_0$ to an outer radius
15 $R_2 = b * R_0$ shows "contiguously" low value. There the algorithm searches for those angles whose intensity values of the radial intensity profile are below a preset threshold "contiguously" between radii R_1 and R_2 . Typical values for a
20 and b are 0.4 and 0.85 respectively. Both parameters can be meter-dependent. Since a needle has some finite width, several contiguous angles satisfy this requirement. Then an average can be taken as the needle angle if all angles are contiguous. If there are more than one group of contiguous
25 angles, then it is an indication of multiple detected needles. For analog meter with only one needle, multiple detected needles will signal an error.

Once the angle of the needle is extracted, the next step 14
30 is to project its angular position onto the graduation marks detected earlier. If the number of graduation marks is one more than the designed number, it can be verified now that the extra tooth indeed comes from the needle. If not, it is possible that the pointer does not appear as a separate teeth
35 and some spurious intensity noise has generated the extra teeth. By examining the spacing between the teeth, this spurious tooth can be removed.

The last step 15 is to convert the needle angle to meter reading. There are two methods. The first is to find the two graduation marks where the pointer lies between. From the relative angular position of the pointer and the two neighboring marks, a sub-graduation reading can be made by interpolating between the angles of the two graduation marks. The second method is to fit all the detected graduation marks with a continuous linear function or nonlinear function so that a mapping between the angle to the reading can be made. Knowing the angle from the first scale mark to the needle, the reading can be obtained from the fitted mapping function. As mentioned in the beginning, the first graduation mark may not necessarily represent a zero reading.

The processing flow as shown in Figure 2 can determine the arbitrary position and orientation of the analog meter. This is especially useful during the training phase, or during the field installation testing after installing the automatic reader to the field meters. Afterward, if the imaging conditions remain the same, then the position of the scale center, the angular position of the first graduation mark, the average spacing between graduation marks and the mapping between angle to reading will not change. Therefore for a new reading, only the needle angle needs to be detected and located. In other words, only the last three processing steps 13, 14, 15 in Figure 2 are needed once the relative positions between the meter and the meter reader is fixed.

Referring to Figure 8, the switching between the full processing of meter reading (8 - 12 in Figure 2 and step 93 in Figure 8) and needle localization processing (13 - 15 in Figure 2 and step 93 in Figure 8) can be done automatically by using one parameter readily available in the needle localization processing. In the processing step 13, There are several contiguous angles where the intensity is continuously below the threshold intensity along the radial direction from R_1 to R_2 .

When there is one needle detected, the number of these contiguous angles (denoted as N) is proportional to the width of the needle and should remain roughly the same when the needle is rotated to different angle. However, if the relative imaging conditions changes (such as the when the analog meter is moved), then the needle localization processing can detect no needle, or multiple "false" needles, or possibly one "false" needle. Therefore, when one needle is detected, the algorithm checks if N changes substantially from the previous needle localization processing in step 94. If yes, it is an indication of the change of imaging conditions and the algorithm switches to the full processing. This process is shown in Figure 8 when the algorithm performs the meter reading continuously in a loop 93, 94, 95, and 96. Since the meter and graduation scale detection/localization normally take longer to compute, the partial processing of needle localization can increase the response time of the system substantially. Thus, the processing time which is in the range of several seconds for the full algorithm including Hough Transform can be reduced to a fraction of a second for the needle detection and localization only.

The algorithm described above can be extended for situations when the camera views the analog meter from an oblique angle. There are several changes to the image. First, the circular graduation scale becomes an elliptical graduation scale. However the radial line segments of the graduation marks still intercepts at the center of the graduation scale. Therefore the Hough Transform according to the invention still works for the elliptical radial line segment pattern. If the oblique viewing angle is Φ , then along the major axis of the elliptical graduation scale, the mean major radius is still R_0 and the mean minor radius is reduced to $R_0 * \cos\Phi$ along the minor axis. The length of the radial line segment is also reduced by a $\cos\Phi$ factor from the major axis direction to the minor axis direction. The spacing between two contiguous graduation marks however is reverse, going from a distance of

Δg to $\Delta g * \cos\Phi$ from the minor axis to the major axis. In other words, the ratio of the angle of two contiguous graduation marks along the major axis to that along the minor axis is $\cos^2\Phi$. The second change in the oblique meter image is

5 that the center of the pointer no longer coincides with the center of the graduation scale. This is because the pointer rotates on a plane that is higher than the plane of the scale. Therefore the technique to perform the reading from an oblique image will be different. The third possible change is

10 that the round casing of the analog meter may obstruct some graduation marks. The present invention can still perform the reading of an analog meter even when part of the radial line segment is missing for some graduation marks. If the obstruction is so large that the complete radial line segment is

15 missing for some graduation marks, then the system will raise an error message.

Figure 7 depicts an overview of the processing flow when the meter is viewed obliquely. The first step 52 is the same as

20 that in Figure 2. The second step 53 uses the Hough Transform algorithm according to the invention to detect and locate the elliptical RLS pattern. It is similar to that for the circular RLS pattern except that the two operating parameters R_0 and L need to be selected differently. From the center of the

25 graduation scale, the strong edge points of the graduation marks can now have a shortest distance of $R_0 * \cos\Phi - L * \cos\Phi/2$ up to a longest distance of $R_0 + L/2$. Therefore instead of specifying R_0 and L to the Hough Transform algorithm, the user selects the shortest distance R_1 and the lon-

30 gest distance R_2 of the edge points of the graduation marks during the training. The system computes the R_0 and L by using the formula: $R_0 = (R_1 + R_2)/2$ and $L = R_2 - R_1$. The length of the candidate line segment G on the parameter plane is then equal to $\alpha * L$, where α can be a fixed number different

35 from that for the circular RLS pattern.

The following step 54 is also the same as that in Figure 2. The peak from the vote accumulation of the Hough Transform still stands out clearly on the parameter plane. The next two steps 55, 56 are the same as those in the case of circular

5 RLS. There are two situations. When the viewing angle is small or the graduation marks are long, the intensity profile can capture all the graduation marks and the graduation scale can be detected correctly. Then the algorithm can proceed to step 58 after the decision box 57. However, if the viewing

10 angle is large, the intensity profile along one single circle may not capture all the graduation marks that are now on an ellipse. In this case only certain sections of the graduation marks will be detected on one single intensity profile. Multiple circular intensity profiles at different radii are needed.

15 This is done in step 62 by repeating the extraction of intensity profiles and the detection of the graduation marks from all circles with radii ranging from R_1 to R_2 . The teeth extracted from one intensity profile can correspond to some points on the graduation marks of the meter scale, but not

20 all. Furthermore multiple teeth extracted from intensity profiles of different radii can belong to the same graduation mark. Thus step 63 is used to merge all the angular coordinates of all the teeth together, then order them according to the angular value, and then group teeth with nearly the same

25 angular positions together. Each grouping of the teeth can correspond to one graduation mark, or a corresponding angle of a radial line segment. The angular position of the graduation mark can then be computed as the average or the median of all the teeth in one grouping. At this point, there is one

30 comb whose number of teeth is within plus or minus one of the design number of graduation marks. Then this is the detected graduation scale with each graduation mark located at an angular position that is the average of all angles belonging to the same radial line segment as mentioned earlier.

35

After the graduation scale is detected and located in 57 or 63, the next step 58 is to detect and locate the center of

the needle. As mentioned earlier, the center of the needle does not coincide with the center of graduation scale obtained in 54. To determine the center of the needle, the traditional Hough Transform for circle detection is used since
5 the needle has the shape of either a black disk or a white hole near the needle pivot center. Due to the fact that the center of the needle is not far from the center of the graduation scale, the Hough Transform can be speeded up by using only strong edge points within a region near the graduation
10 scale center. Once the center of the needle is obtained, the needle angle can be determined using the same technique 13 of Figure 2. However this needle angle is with respect to the needle center, not the center of the graduation scale where the reading can be made. Therefore, a vector originating from
15 the center of the graduation scale and parallel to the needle angle can be drawn. This vector corresponds to the projection of the needle pointer from the needle rotational plane to the plane of the graduation scale. Once the pointer is on the scale plane, the angular position of the pointer from the
20 first graduation mark can be determined and the reading can be obtained using the same algorithm as described in step 15 of Figure 2.

THIS PAGE BLANK (USPTO)

Claims

1. Method for monitoring an analog meter having a set of graduation segments and at least one needle, the method comprising the steps of:

- recording a digitized image of the meter,
- extracting a set of edge points (29, 30) representative of the graduation segments from said image (8),
- performing a Hough Transform on said set of edge points to obtain a center point of said set of graduation segments (9, 10), and
- extracting an intensity profile of said image along a path through said graduation segments to obtain a set of detected graduation segments (11, 12) and to obtain a position of said needle relative to said set of detected graduation segments (13, 14, 15).

2. Method according to claim 1,
c h a r a c t e r i z e d b y

- obtaining a parameter representative of the accuracy of the position of said needle (91, 95) and performing the steps of recording a digitized image of the meter and obtaining the position of said needle (93, 95, 96) without a step of performing a Hough Transform to obtain the position of the center point as long as said parameter meets a predefined condition (94) and performing said Hough Transform to obtain said center point (92) when said parameter does not meet said predefined condition.

3. Method according to claim 2,
c h a r a c t e r i z e d i n t h a t

a number of discret contiguous angles is obtained for said parameter where the intensity profile is below a threshold intensity (94).

4. Method according to one of claims 1 to 3,
c h a r a c t e r i z e d i n t h a t

said step of performing a Hough Transform comprises: for a subset of graduation segments obtaining a corresponding candidate segment (23, 27, 35) orthogonal to an edge gradient (32, 33) of an edge point (29, 30) of each graduation segment (28) of said subset whereby the candidate segment (23, 27, 35) is located at a predefined distance from the edge point of said each graduation segment, and obtaining an extreme value of the distribution of the candidate segments (37) of said subset and obtaining a centroid of said extreme value.

5
10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995
1000
1005
1010
1015
1020
1025
1030
1035
1040
1045
1050
1055
1060
1065
1070
1075
1080
1085
1090
1095
1100
1105
1110
1115
1120
1125
1130
1135
1140
1145
1150
1155
1160
1165
1170
1175
1180
1185
1190
1195
1200
1205
1210
1215
1220
1225
1230
1235
1240
1245
1250
1255
1260
1265
1270
1275
1280
1285
1290
1295
1300
1305
1310
1315
1320
1325
1330
1335
1340
1345
1350
1355
1360
1365
1370
1375
1380
1385
1390
1395
1400
1405
1410
1415
1420
1425
1430
1435
1440
1445
1450
1455
1460
1465
1470
1475
1480
1485
1490
1495
1500
1505
1510
1515
1520
1525
1530
1535
1540
1545
1550
1555
1560
1565
1570
1575
1580
1585
1590
1595
1600
1605
1610
1615
1620
1625
1630
1635
1640
1645
1650
1655
1660
1665
1670
1675
1680
1685
1690
1695
1700
1705
1710
1715
1720
1725
1730
1735
1740
1745
1750
1755
1760
1765
1770
1775
1780
1785
1790
1795
1800
1805
1810
1815
1820
1825
1830
1835
1840
1845
1850
1855
1860
1865
1870
1875
1880
1885
1890
1895
1900
1905
1910
1915
1920
1925
1930
1935
1940
1945
1950
1955
1960
1965
1970
1975
1980
1985
1990
1995
2000
2005
2010
2015
2020
2025
2030
2035
2040
2045
2050
2055
2060
2065
2070
2075
2080
2085
2090
2095
2100
2105
2110
2115
2120
2125
2130
2135
2140
2145
2150
2155
2160
2165
2170
2175
2180
2185
2190
2195
2200
2205
2210
2215
2220
2225
2230
2235
2240
2245
2250
2255
2260
2265
2270
2275
2280
2285
2290
2295
2300
2305
2310
2315
2320
2325
2330
2335
2340
2345
2350
2355
2360
2365
2370
2375
2380
2385
2390
2395
2400
2405
2410
2415
2420
2425
2430
2435
2440
2445
2450
2455
2460
2465
2470
2475
2480
2485
2490
2495
2500
2505
2510
2515
2520
2525
2530
2535
2540
2545
2550
2555
2560
2565
2570
2575
2580
2585
2590
2595
2600
2605
2610
2615
2620
2625
2630
2635
2640
2645
2650
2655
2660
2665
2670
2675
2680
2685
2690
2695
2700
2705
2710
2715
2720
2725
2730
2735
2740
2745
2750
2755
2760
2765
2770
2775
2780
2785
2790
2795
2800
2805
2810
2815
2820
2825
2830
2835
2840
2845
2850
2855
2860
2865
2870
2875
2880
2885
2890
2895
2900
2905
2910
2915
2920
2925
2930
2935
2940
2945
2950
2955
2960
2965
2970
2975
2980
2985
2990
2995
3000
3005
3010
3015
3020
3025
3030
3035
3040
3045
3050
3055
3060
3065
3070
3075
3080
3085
3090
3095
3100
3105
3110
3115
3120
3125
3130
3135
3140
3145
3150
3155
3160
3165
3170
3175
3180
3185
3190
3195
3200
3205
3210
3215
3220
3225
3230
3235
3240
3245
3250
3255
3260
3265
3270
3275
3280
3285
3290
3295
3300
3305
3310
3315
3320
3325
3330
3335
3340
3345
3350
3355
3360
3365
3370
3375
3380
3385
3390
3395
3400
3405
3410
3415
3420
3425
3430
3435
3440
3445
3450
3455
3460
3465
3470
3475
3480
3485
3490
3495
3500
3505
3510
3515
3520
3525
3530
3535
3540
3545
3550
3555
3560
3565
3570
3575
3580
3585
3590
3595
3600
3605
3610
3615
3620
3625
3630
3635
3640
3645
3650
3655
3660
3665
3670
3675
3680
3685
3690
3695
3700
3705
3710
3715
3720
3725
3730
3735
3740
3745
3750
3755
3760
3765
3770
3775
3780
3785
3790
3795
3800
3805
3810
3815
3820
3825
3830
3835
3840
3845
3850
3855
3860
3865
3870
3875
3880
3885
3890
3895
3900
3905
3910
3915
3920
3925
3930
3935
3940
3945
3950
3955
3960
3965
3970
3975
3980
3985
3990
3995
4000
4005
4010
4015
4020
4025
4030
4035
4040
4045
4050
4055
4060
4065
4070
4075
4080
4085
4090
4095
4100
4105
4110
4115
4120
4125
4130
4135
4140
4145
4150
4155
4160
4165
4170
4175
4180
4185
4190
4195
4200
4205
4210
4215
4220
4225
4230
4235
4240
4245
4250
4255
4260
4265
4270
4275
4280
4285
4290
4295
4300
4305
4310
4315
4320
4325
4330
4335
4340
4345
4350
4355
4360
4365
4370
4375
4380
4385
4390
4395
4400
4405
4410
4415
4420
4425
4430
4435
4440
4445
4450
4455
4460
4465
4470
4475
4480
4485
4490
4495
4500
4505
4510
4515
4520
4525
4530
4535
4540
4545
4550
4555
4560
4565
4570
4575
4580
4585
4590
4595
4600
4605
4610
4615
4620
4625
4630
4635
4640
4645
4650
4655
4660
4665
4670
4675
4680
4685
4690
4695
4700
4705
4710
4715
4720
4725
4730
4735
4740
4745
4750
4755
4760
4765
4770
4775
4780
4785
4790
4795
4800
4805
4810
4815
4820
4825
4830
4835
4840
4845
4850
4855
4860
4865
4870
4875
4880
4885
4890
4895
4900
4905
4910
4915
4920
4925
4930
4935
4940
4945
4950
4955
4960
4965
4970
4975
4980
4985
4990
4995
5000
5005
5010
5015
5020
5025
5030
5035
5040
5045
5050
5055
5060
5065
5070
5075
5080
5085
5090
5095
5100
5105
5110
5115
5120
5125
5130
5135
5140
5145
5150
5155
5160
5165
5170
5175
5180
5185
5190
5195
5200
5205
5210
5215
5220
5225
5230
5235
5240
5245
5250
5255
5260
5265
5270
5275
5280
5285
5290
5295
5300
5305
5310
5315
5320
5325
5330
5335
5340
5345
5350
5355
5360
5365
5370
5375
5380
5385
5390
5395
5400
5405
5410
5415
5420
5425
5430
5435
5440
5445
5450
5455
5460
5465
5470
5475
5480
5485
5490
5495
5500
5505
5510
5515
5520
5525
5530
5535
5540
5545
5550
5555
5560
5565
5570
5575
5580
5585
5590
5595
5600
5605
5610
5615
5620
5625
5630
5635
5640
5645
5650
5655
5660
5665
5670
5675
5680
5685
5690
5695
5700
5705
5710
5715
5720
5725
5730
5735
5740
5745
5750
5755
5760
5765
5770
5775
5780
5785
5790
5795
5800
5805
5810
5815
5820
5825
5830
5835
5840
5845
5850
5855
5860
5865
5870
5875
5880
5885
5890
5895
5900
5905
5910
5915
5920
5925
5930
5935
5940
5945
5950
5955
5960
5965
5970
5975
5980
5985
5990
5995
6000
6005
6010
6015
6020
6025
6030
6035
6040
6045
6050
6055
6060
6065
6070
6075
6080
6085
6090
6095
6100
6105
6110
6115
6120
6125
6130
6135
6140
6145
6150
6155
6160
6165
6170
6175
6180
6185
6190
6195
6200
6205
6210
6215
6220
6225
6230
6235
6240
6245
6250
6255
6260
6265
6270
6275
6280
6285
6290
6295
6300
6305
6310
6315
6320
6325
6330
6335
6340
6345
6350
6355
6360
6365
6370
6375
6380
6385
6390
6395
6400
6405
6410
6415
6420
6425
6430
6435
6440
6445
6450
6455
6460
6465
6470
6475
6480
6485
6490
6495
6500
6505
6510
6515
6520
6525
6530
6535
6540
6545
6550
6555
6560
6565
6570
6575
6580
6585
6590
6595
6600
6605
6610
6615
6620
6625
6630
6635
6640
6645
6650
6655
6660
6665
6670
6675
6680
6685
6690
6695
6700
6705
6710
6715
6720
6725
6730
6735
6740
6745
6750
6755
6760
6765
6770
6775
6780
6785
6790
6795
6800
6805
6810
6815
6820
6825
6830
6835
6840
6845
6850
6855
6860
6865
6870
6875
6880
6885
6890
6895
6900
6905
6910
6915
6920
6925
6930
6935
6940
6945
6950
6955
6960
6965
6970
6975
6980
6985
6990
6995
7000
7005
7010
7015
7020
7025
7030
7035
7040
7045
7050
7055
7060
7065
7070
7075
7080
7085
7090
7095
7100
7105
7110
7115
7120
7125
7130
7135
7140
7145
7150
7155
7160
7165
7170
7175
7180
7185
7190
7195
7200
7205
7210
7215
7220
7225
7230
7235
7240
7245
7250
7255
7260
7265
7270
7275
7280
7285
7290
7295
7300
7305
7310
7315
7320
7325
7330
7335
7340
7345
7350
7355
7360
7365
7370
7375
7380
7385
7390
7395
7400
7405
7410
7415
7420
7425
7430
7435
7440
7445
7450
7455
7460
7465
7470
7475
7480
7485
7490
7495
7500
7505
7510
7515
7520
7525
7530
7535
7540
7545
7550
7555
7560
7565
7570
7575
7580
7585
7590
7595
7600
7605
7610
7615
7620
7625
7630
7635
7640
7645
7650
7655
7660
7665
7670
7675
7680
7685
7690
7695
7700
7705
7710
7715
7720
7725
7730
7735
7740
7745
7750
7755
7760
7765
7770
7775
7780
7785
7790
7795
7800
7805
7810
7815
7820
7825
7830
7835
7840
7845
7850
7855
7860
7865
7870
7875
7880
7885
7890
7895
7900
7905
7910
7915
7920
7925
7930
7935
7940
7945
7950
7955
7960
7965
7970
7975
7980
7985
7990
7995
8000
8005
8010
8015
8020
8025
8030
8035
8040
8045
8050
8055
8060
8065
8070
8075
8080
8085
8090
8095
8100
8105
8110
8115
8120
8125
8130
8135
8140
8145
8150
8155
8160
8165
8170
8175
8180
8185
8190
8195
8200
8205
8210
8215
8220
8225
8230
8235
8240
8245
8250
8255
8260
8265
8270
8275
8280
8285
8290
8295
8300
8305
8310
8315
8320
8325
8330
8335
8340
8345
8350
8355
8360
8365
8370
8375
8380
8385
8390
8395
8400
8405
8410
8415
8420
8425
8430
8435
8440
8445
8450
8455
8460
8465
8470
8475
8480
8485
8490
8495
8500
8505
8510
8515
8520
8525
8530
8535
8540
8545
8550
8555
8560
8565
8570
8575
8580
8585
8590
8595
8600
8605
8610
8615
8620
8625
8630
8635
8640
8645
8650
8655
8660
8665
8670
8675
8680
8685
8690
8695
8700
8705
8710
8715
8720
8725
8730
8735
8740
8745
8750
8755
8760
8765
8770
8775
8780
8785
8790
8795
8800
8805
8810
8815
8820
8825
8830
8835
8840
8845
8850
8855
8860
8865
8870
8875
8880
8885
8890
8895
8900
8905
8910
8915
8920
8925
8930
8935
8940
8945
8950
8955
8960
8965
8970
8975
8980
8985
8990
8995
9000
9005
9010
9015
9020
9025
9030
9035
9040
9045
9050
9055
9060
9065
9070
9075
9080
9085
9090
9095
9100
9105
9110
9115
9120
9125
9130
9135
9140
9145
9150
9155
9160
9165
9170
9175
9180
9185
9190
9195
9200
9205
9210
9215
9220
9225
9230
9235
9240
9245
9250
9255
9260
9265
9270
9275
9280
9285
9290
9295
9300
9305
9310
9315
9320
9325
9330
9335
9340
9345
9350
9355
9360
9365
9370
9375
9380
9385
9390
9395
9400
9405
9410
9415
9420
9425
9430
9435
9440
9445
9450
9455
9460
9465
9470
9475
9480
9485
9490
9495
9500
9505
9510
9515
9520
9525
9530
9535
9540
9545
9550
9555
9560
9565
9570
9575
9580
9585
9590
9595
9600
9605
9610
9615
9620
9625
9630
9635
9640
9645
9650
9655
9660
9665
9670
9675
9680
9685
9690
9695
9700
9705
9710
9715
9720
9725
9730
9735
9740
9745
9750
9755
9760
9765
9770
9775
9780
9785
9790
9795
9800
9805
9810
9815
9820
9825
9830
9835
9840
9845
9850
9855
9860
9865
9870
9875
9880
9885
9890
9895
9900
9905
9910
9915
9920
9925
9930
9935
9940
9945
9950
9955
9960
9965
9970
9975
9980
9985
9990
9995
10000
10005
10010
10015
10020
10025
10030
10035
10040
10045
10050
10055
10060
10065
10070
10075
10080
10085
10090
10095
10100
10105
10110
10115
10120
10125
10130
10135
10140
10145
10150
10155
10160
10165
1

further set of edge points thereby obtaining a pivot center of the needle, and projecting the detected position of the needle to the plane of the graduation scale.

- 5 9. Method according to any of claims 1 to 8,
c h a r a c t e r i z e d b y
comparing the position of the needle relative to said de-
tected graduation segments to obtain a digital value for the
display status of the meter and comparing said digital value
10 to a preset value and transmitting a message to a control
station via a communication network (83).
10. Apparatus for performing the method for monitoring of an
analog meter according to any of claims 1 to 9 comprising:
15 - a sensor (71) for obtaining a digitized image,
- a processor (72) for extracting a set of edge points repre-
sentative of graduation segments of said meter from said
image, for performing a Hough Transform on said set of edge
points to obtain a center point, for extracting an inten-
20 sity profile of said image along a path through said
graduation segments to obtain a set of detected graduation
segments and for obtaining a position of said needle rela-
tive to said set of detected graduation marks, and
- an interface device (75, 76, 77) to communicate with a com-
25 munication network (83).

THIS PAGE BLANK (USPTO)

Abstract

Method and Apparatus for Monitoring an Analog Meter

- 5 A method and an apparatus for remote monitoring of analog meters employ a Hough Transform on the edge points of the meter scale to obtain the centre of the scale (8, 9, 10). The graduation marks and the needle are detected from the intensity profile along various radii (11, 12, 13). Thereby the
- 10 meter reading can be flexibly adopted to different meter scales during an easy training process. The method can be modified for oblique reading of the scale.

Figure 2

15

THIS PAGE BLANK (USPTO)

EPO - München
29
01. Feb. 2000

FIG. 1



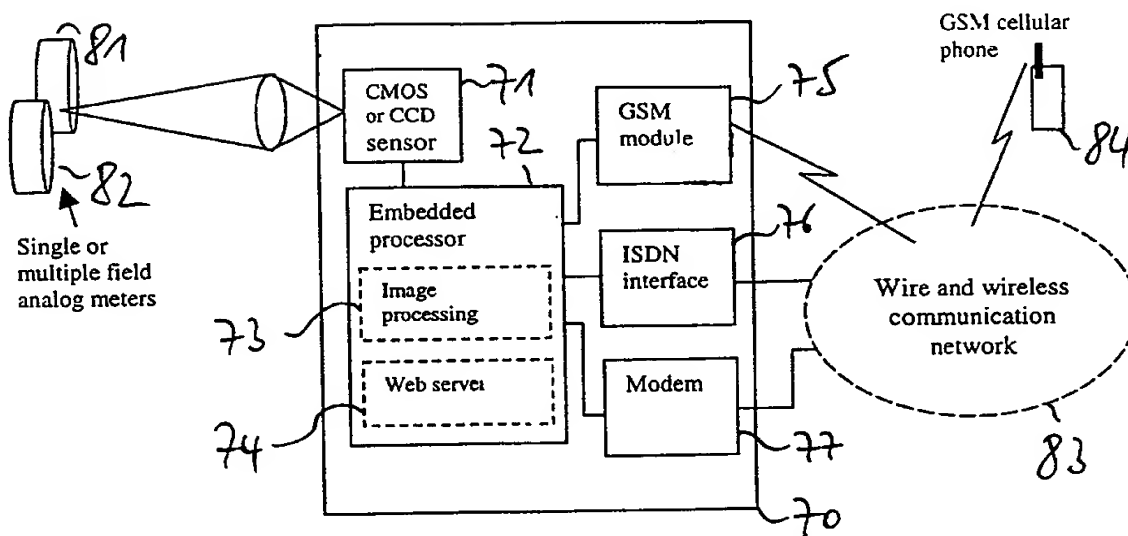


Fig. 3

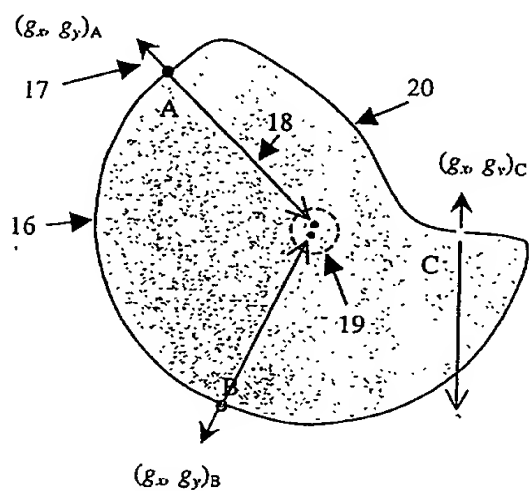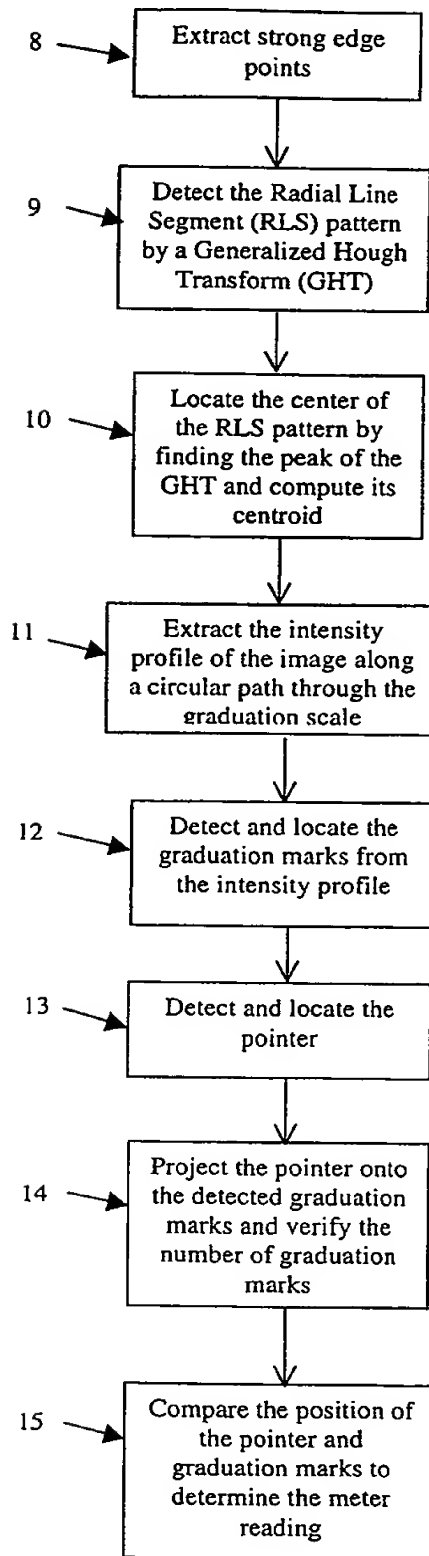

216

Fig. 2



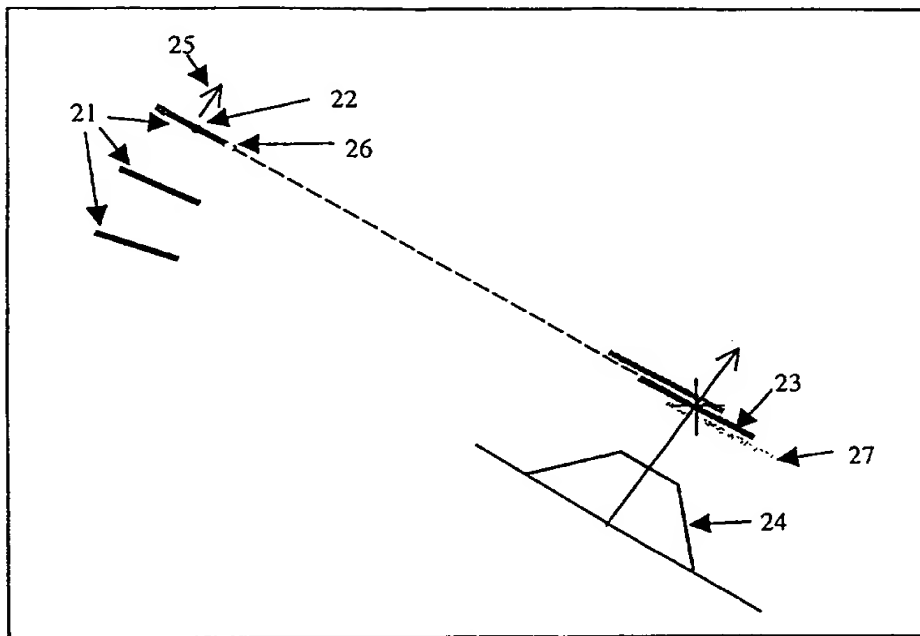


FIG. 4A

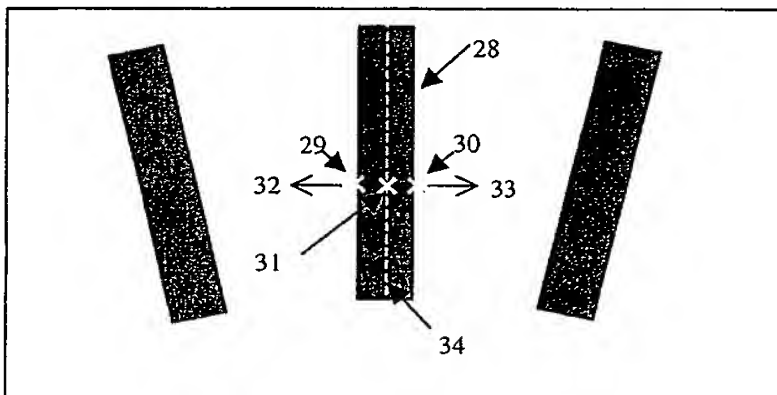


FIG. 4B

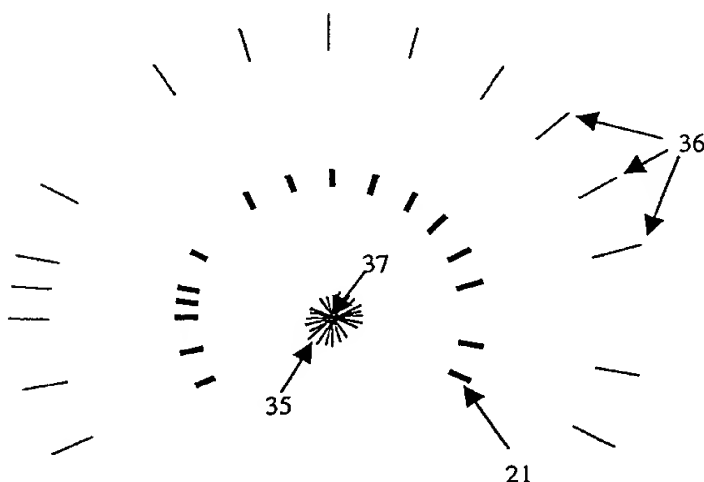


FIG. 4C

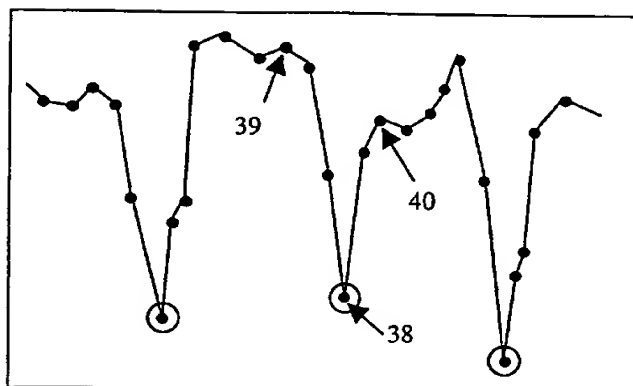


FIG. 5A

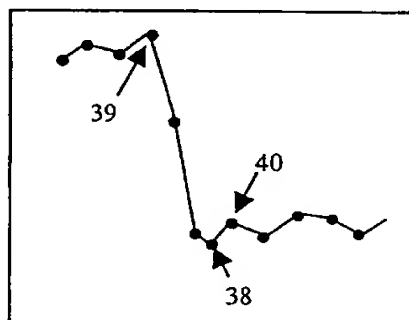


FIG. 5B

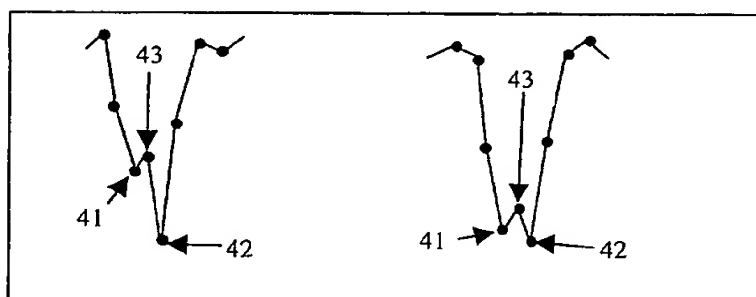
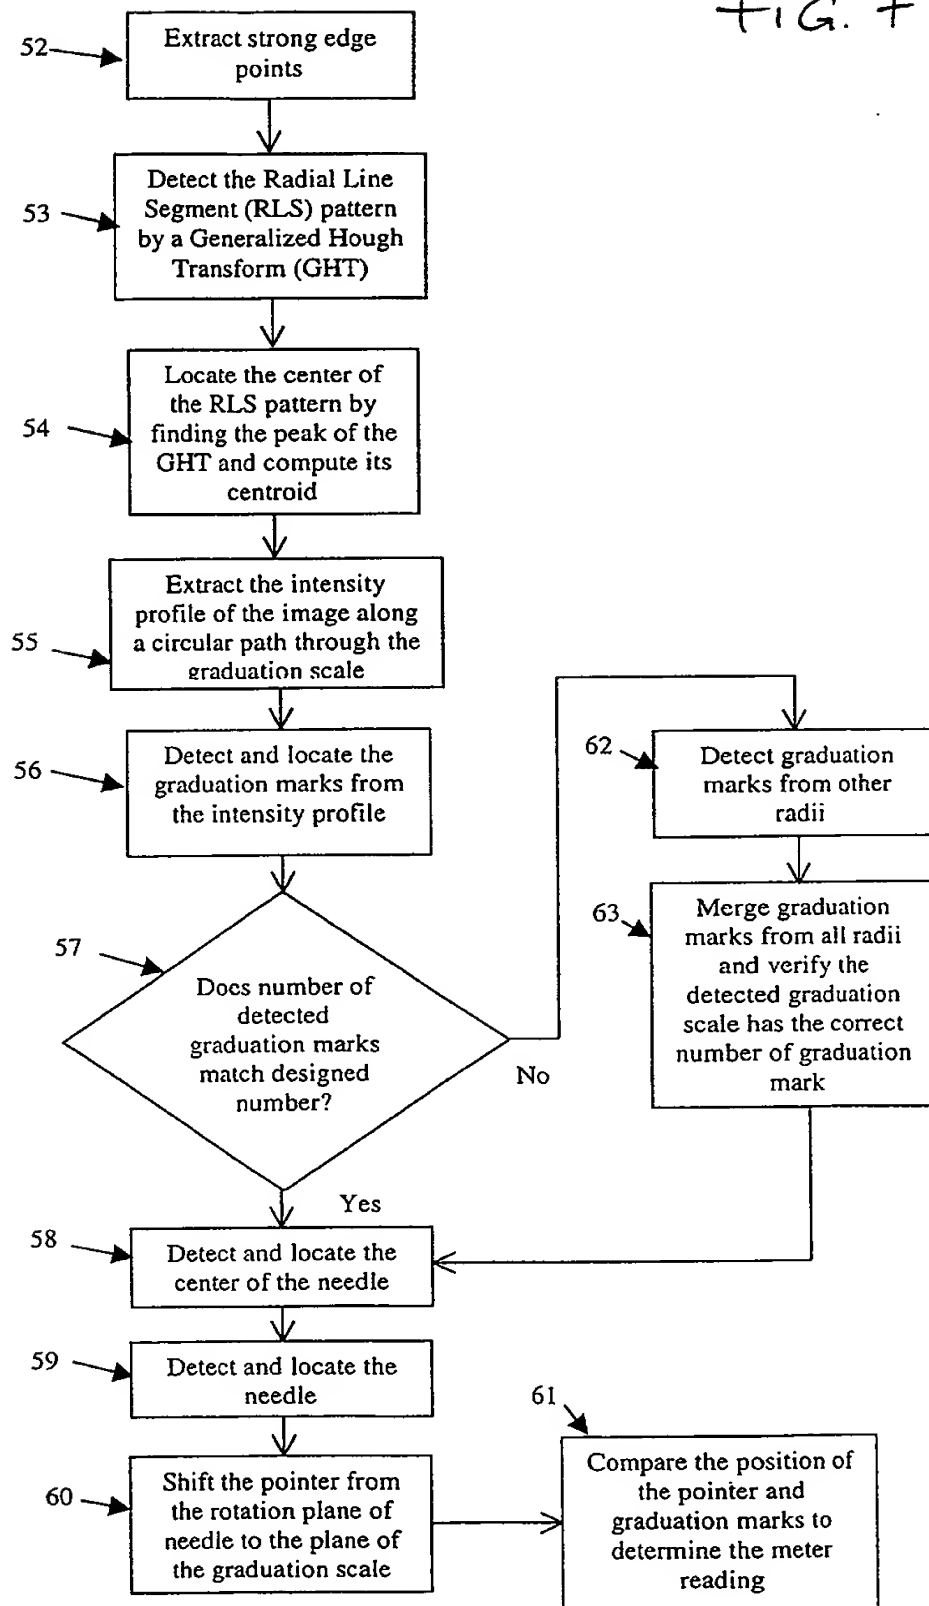


FIG. 5C

516

FIG. 7



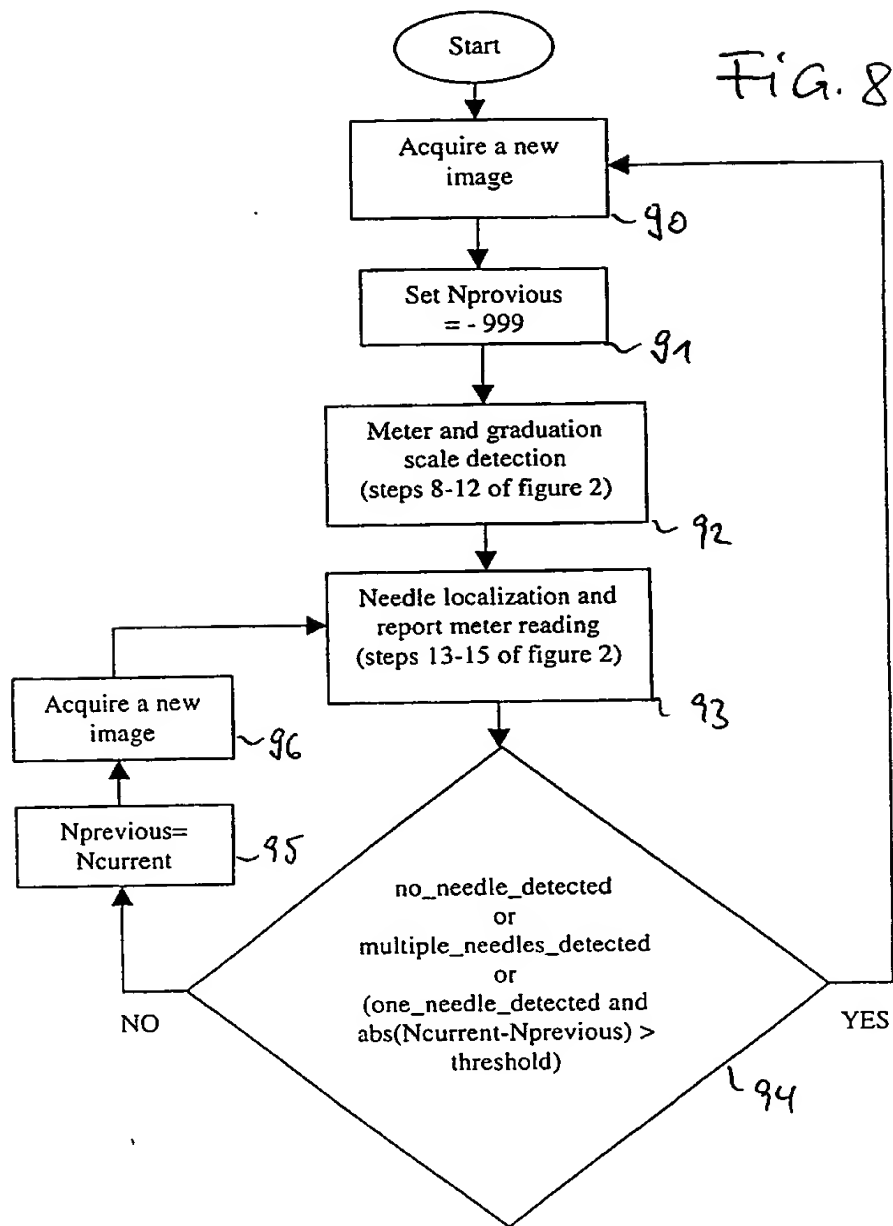


FIG. 6

